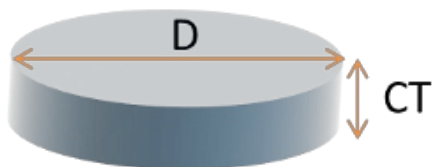


**PN: ST-212-I-Y-A****INPUT PARAMETER**

|                              |                                    |
|------------------------------|------------------------------------|
| Wavelength [nm]:             | 1064                               |
| Required Beam Diameter [mm]: | 7                                  |
| Beam Mode (SM/MM):           | Single Mode TEM00 with $M^2 < 1.5$ |

**ELEMENT PARAMETER**

|                      |               |
|----------------------|---------------|
| Element Type:        | Window        |
| Material:            | Fused Silica  |
| Element Size [mm]:   | 20            |
| Clear Aperture [mm]: | 17.5          |
| Thickness [mm]:      | 3             |
| Coating:             | AR/AR coating |

**OUTPUT PARAMETER**

|                            |               |
|----------------------------|---------------|
| Output Shape:              | Square        |
| Full Angle at 1/e2 [mRad]: | 1.00          |
| Transfer Region [mRad]:    | 0.070         |
| Transmission efficiency:   | Close to 100% |
| Overall Efficiency:        | ~ 94%         |

**Holo/Or can improve the performances of this item. Please send us your requirements**